STOCK Interior Doors



Panel • French • Louver • Moulded • Primed • Bifolds



Quality... Selection... Craftsmanship

Introduction



Choosing the right door for your home can be very involved. Every factor of your home can influence your decision, such as hardwood floors, kitchen cabinets or even staircases. At BROSCO we understand this and are proud to offer a wide range of different wood species and door designs that are in stock and ready for delivery.

BROSCO's vast assortment of quality Interior Doors showcased in this catalog will guide you in choosing the door that will best fit your home's décor. With a wide range of styles and designs offered in Fir, Pine and Knotty Alder as well as Primed and Moulded Doors all IN STOCK and ready for delivery, you can count on BROSCO to deliver a quality door unit to you quickly. If you cannot find what you're looking for in our stock door offerings, don't worry; we have the ability to provide you with factory custom door design options tailored to your specific needs!



Fir



Moulded



Ponderosa Pine



Primed



Knotty Alder



Bifolds

brosco.com Stock Interior Doors

Table of Contents



Stock Interior Doors

| Fir Doors | Primed Doors (con't) |
|-----------------------|---|
| Panel4-5 | Bifold19-20 |
| Bifold5 | Fire Rated21 |
| French6-7 | Pantry14 |
| Specialty7 | Moulded Doors |
| Pine Doors (Imported) | Panel 13/8"22-23 |
| Panel8 | Panel 1 ³ / ₄ "24 |
| French 9 | Bifold25 |
| Louver9 | Studio Collection22 |
| Bifold9 | Flush Doors & Bifold26 |
| Ponderosa Pine Doors | Straddle Lights27 |
| Panel10 | Mirror Doors28 |
| Louver11 | Transom Sash & Direct Set29 |
| Bifold11 | Pocket Door Frame30-31 |
| French12 | Pocket Door Hardware32 |
| Knotty Alder Doors | Wall Mount Sliding Door Hardware33 |
| Panel11 | Prefinishing34 |
| Barn Doors13 | Hinge Options35 |
| | Basic Set-Up Unit36 |
| Primed Doors | Options37 |
| French | - |
| Panel16-18 | Care & Finishing38 |
| Louver19 | Redi-Ship® Program39 |



BROSCO Interior Door units are manufactured using highly skilled craftsman to create the specific door unit you have ordered. The door units are made to order to your exacting specifications. Our shops will make units with split jambs, single or double rabbeted, flat board with or without stops to allow for regional preferences. The offering of finish colors for hinges makes it possible to match your door hardware with other hardware throughout your home, just ask what color. With various casing options, BROSCO has the look that you are in need of to finish the job.

Whether you are interested in a traditional interior door or creating your own custom interior door design, BROSCO is your source for interior doors.

Stock doors subject to change without notice.



Fir Panel Doors - 13/8"





As life goes through your home, you need the right doors to be part of it. Simpson's fir interior panel and bifold doors are created with the same level of care and craftsmanship that goes into every other Simpson door. The inside of your home has to feel just right and we'll help you create that special atmosphere.



Fir Flat Panel • Shaker Sticking • 6'-8" Height



F-720 1-Panel



F-782 2-Panel



F-730 3-Panel



4-Panel
1'-10" & under 2-Panel



F-755 5-Panel



F-760 3-Panel Craftsman 1'-10" & under 2-Panel



F-762 4-Panel Craftsman 1'-10" & under 2-Panel

Stock Door Widths

F-720 / F-782 / F-730 / F-744 / F-755

1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

Craftsman F-760 / F-762

1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

Fir Panel Doors – 1³/₈"



Fir Flat Panel • Ovolo Sticking • 6'-8" Height



F-20 1-Panel



F-82 2-Panel



F-30 3-Panel

Stock Door Widths

F-20 / F-30

1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

F-82

1'-0", 1'-4", 1'-6", 1'-8", 1'-10" 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 3'-0"

Fir Double Hip-Raised Panel • Ovolo Sticking • 6'-8" Height



F-82-RP 2-Panel



F-465 2-Panel



4-Panel
1'-10" & under 2-Panel



F-55 5-Panel



6-Panel 1'-10" & under 3-Panel



F-2FD-66 2 Door Bifold



F-4FD-66 † 4 Door Bifold

Stock Door Widths

F-82-RP / F-465 / F-44

1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

F-55

1'-4", 1'-6", 1'-8", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 3'-0"

F-66

1'-6", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 3'-0"

F-2FD-66 Bifold

F-4FD-66 Bifold

2'-0", 2'-6", 3'-0" 4'-0

4'-0", 5'-0", 6'-0"

† 4 Door consists of two 2 Door packages.

Built By BROSCO 5 brosco.com

Fir French Doors - 13/8"






French doors add a certain flair to your home, and by letting in natural light they help create a warm feeling that's welcome in any type of room. Simpson French doors are available with a wide selection of glass options, any of which will elegantly complete the look you're striving for.



Single-Pane Tempered Glass • Solid Bar True Divided Lights (TDL) • 6'-8" Height



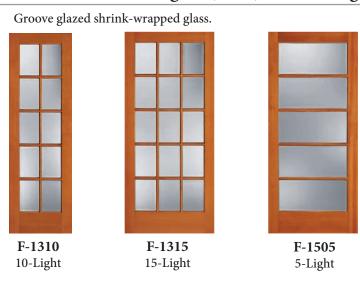

Stock Door Widths

| F-1310 | F-1315 | F-1505 |
|--------|-------------------------------|-------------------------------|
| 2'-0" | 2'-4", 2'-6", 2'-8", 3'-0" | 1'-6", 2'-6", 2'-8", 3'-0" |

brosco.com Stock Interior Doors

Fir French Doors - 13/8"



Single-Pane Tempered Glass • Solid Bar True Divided Lights (TDL) • 6'-8" Height



F-1580 10-Light



F-1309 9-Light



F-1590 Pantry



F-1592 Grain



F-1644 4-Light Satin Etch **Obscure Glass**

Stock Door Widths

| F-1580 | F-1309 | F-1590 | F-1592 | F-1644 |
|---------------------|--------------|---------------------|--------|--|
| 2'-6", 2'-8", 3'-0" | 2'-6", 3'-0" | 2'-0", 2'-4", 2'-6" | 2'-6" | 1'-6", 2'-0", 2'-4" 2'-6", 2'-8", 3'-0" |

Fir Sash Doors • 6'-8" Height

- 3/4" Thick Double Hip-Raised Panels
- Single-Pane Tempered Glass
- Solid Bar True Divided Lights (TDL)



F-117



F-318H



F-944

Stock Door Widths

| F-117 | F-318H | F-944 |
|---------------|--------------|---------------------|
| 2'-6"�, 2'-8" | 2'-6", 2'-8" | 2'-6", 2'-8", 3'-0" |

❖ F-117 also available 2'-6" x 6'-0".

Fir Doors • 6'-8" Height





F-1501



1/4" Magnetic

Double-Sided

F-1182

Stock Door Widths

| F-1501 | F-1182 |
|-------------------------------------|--------|
| 2'-0", 2'-4", 2'-6" 2'-8", 3'-0" | 2'-6" |

Built By BROSCO brosco.com

Pine Doors - 13/8"



1/2" Flat Panel • Shaker Sticking • 6'-8" Height



B-11S 1-Panel



B-22S 2-Panel



3-Panel 1'-6" & under 2-Panel



B-44S 4-Panel 1'-6" & under 2-Panel

Stock Door Widths

| B-11S | B-22S | B-35S | B-44S |
|-----------------------------|-----------------------------|-----------------------------|--|
| 1'-0", 1'-3", 1'-6", 2'-0", | 1'-0", 1'-3", 1'-6", 2'-0", | 1'-0", 1'-3", 1'-6", 2'-0", | 1'-0", 1'-3", 1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0" |
| 2'-4", 2'-6", 2'-8", 3'-0" | 2'-4", 2'-6", 2'-8", 3'-0" | 2'-4", 2'-6", 2'-8", 3'-0" | |

3/8" Flat Panel • Ovolo Sticking 6'-8" Height



B-22 2-Panel

Stock Door Widths

| B-22 |
|------------------------------------|
| 1'-0", 1'-3", 1'-6", 2'-0", 2'-4", |
| 2'-6", 2'-8", 3'-0" |

Double Hip-Raised Panel • Ovolo Sticking 6'-8" Height

Double

Panels



4-Panel 1'-6" & under 2-Panel



B-66 6-Panel 1'-10" & under 3-Panel


Stock Door Widths

| B-44 | B-66 |
|---|--|
| 1'-0", 1'-3", 1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0" | 1'-0", 1'-2", 1'-3", 1'-4", 1'-6", 1'-8", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0" |

Pine Doors - 13/8"



French Doors • Ovolo Sticking 6'-8" Height



Stock Door Widths

| B-1510 | B-1515 |
|--------|----------------------------|
| 2'-0" | 2'-4", 2'-6", 2'-8", 3'-0" |

Bifold Doors • 6'-8" Height

2-1/4" Wide Louver Slats

Plantation Louver



B-2FD-732-PL B-4FD-732-PL † Open Louver/Panel



B-2FD-66 B-4FD-66 † 6-Panel

Stock Bifold Widths

| B-2FD-732-PL | B-2FD-66 | |
|---------------------|---------------------|--|
| 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | |
| B-4FD-732-PL | B-4FD-66 | |
| 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | |

Plantation Louver Doors • 6'-8" Height

Wide

Slats



B-730-PL Open Louver



B-732-PL Open Louver/Panel

Stock Door Widths

| B-730-PL | B-732-PL |
|-----------------------------|-----------------------------|
| 1'-6", 2'-0", 2'-4", 2'-6", | 1'-6", 2'-0", 2'-4", 2'-6", |
| 2'-8", 3'-0" | 2'-8", 3'-0" |

1" Thick Bifold Doors • 6'-8" Height

1-1/4" Louver Slats



B-2FD-730-1 B-4FD-730-1 † Open Louver



B-2FD-732-1 B-4FD-732-1 † Open Louver/Panel



B-2FD-66-1 B-4FD-66-1 † 6-Panel

Stock Bifold Widths

| B-2FD-730-1 | B-2FD-732-1 | B-2FD-66-1 |
|---------------------|---------------------|---------------------|
| 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" |
| B-4FD-730-1 | B-4FD-732-1 | B-4FD-66-1 |
| 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" |

† 4 Door consists of two 2 Door packages.

9 Built By BROSCO brosco.com

Ponderosa Pine Doors – 1³/₈"





Rogue Valley Door wood panel doors offer the charm and quality of true stile and rail construction that provide wonderful solutions for the interior of your home.

Rogue Valley Door

Raised Panel • Ovolo Sticking • 6'-8" Height



P-1053 4-Panel 1'-10" & under 2-Panel



P-1051 6-Panel 1'-10" & under 3-Panel

1/2" Flat Panel -



P-1044 4-Panel 1'-6" & under 2-Panel

Stock Door Widths

| P-1053 | P-1051 ۞ (6'-6" & 6'-8" Ht.) | P-1044 |
|--|--|---|
| 1'-2", 1'-3", 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0" | 1'-0", 1'-2", 1'-3", 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0" | 1'-6", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0" |
| P-1053 (6'-6" Ht.) | | |

1'-0", 1'-3", 1'-6", 1'-8", 2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

Ponderosa Pine Doors – 13/8"



Louver Doors • 6'-8" Ht.

1-1/4" Louver Slats



P-730 Open Louver

Stock Door Widths

| P-730 | | |
|------------------------------|--|--|
| 1'-0", 1'-2", 1'-3", 1'-6", | | |
| 1'-8", 1'-10", 2'-0", 2'-2", | | |
| 2'-4", 2'-6", 2'-8", 3'-0" | | |

Bifold Doors • 6'-8" Height

9/16" Raised Panel



P-2FD-1051 P-4FD-1051 †

P-2FD-1053 P-4FD-1053 †

1-1/4" Louver Slats

P-2FD-730* P-4FD-730

Stock Bifold Widths

| P-2FD-1051 | P-2FD-1053 | P-2FD-730 |
|-----------------------------------|--------------|---------------------|
| 2'-0", 2'-4", 2'-6", 2'-8", 3'-0" | 2'-6", 3'-0" | 2'-6", 2'-8", 3'-0" |
| P-4FD-1051 | P-4FD-1053 | P-4FD-730 |
| 4'-0", 5'-0", 6'-0" | 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" |

Knotty Alder Doors – 1³/8"

Raised Panel • Ovolo Sticking • 6'-8" Height



KA-82 2-Panel



KA-465 2-Panel



Engineered Stiles & Rails with Veneer Solid 3/4" Thick Double Hip-Raised Panels

Stock Door Widths

| KA-82 | KA-465 |
|-----------------------------|----------------------|
| 1'-6", 2'-0", 2'-2", 2'-4", | 2'-0", 2'-4", 2'-6", |
| 2'-6", 2'-8", 3'-0" | 2'-8", 3'-0" |

^{† 4} Door consists of two 2 Door packages.

[★] Also available in 6'-6" height.

Ponderosa Pine French Doors – 1³/₈"



Whether they lead into a den, bedroom or home office, interior French doors bring a unique touch of elegance to any room. French interior doors are one of the best ways to separate a space without eliminating the openness in your home.

Rogue Valley Door



Single-Pane Tempered Glass • Ovolo Sticking 6'-8" Height



P-3901 / 1501Full Light



P-1510 10-Light



P-1515 15-Light

Stock Door Widths

| P-3901 / 1501 | P-1510 | P-1515 |
|---------------------|--------|----------------------------|
| 2'-6", 2'-8", 3'-0" | 2'-0" | 2'-4", 2'-6", 2'-8", 3'-0" |

Obscure Ceramic Frit Tempered Glass 6'-8" Height



P-3901-F / 1501-F Full Light

Stock Door Widths

P-3901-F / 1501-F 2'-6"







Plank Panel • Shaker Sticking • 7'-0" Height

3/4" Plank Panels with 3/8" Wide Grooves



KA-80801 Knotty Alder



KA-80812 Knotty Alder

Stock Door Widths

| KA-80801 | KA-80812 |
|---------------|---------------|
| 3'-6" x 7'-0" | 3'-6" x 7'-0" |

KA-80801 has a full width bottom and top rail

Barn Door Kits • 7-0" Height

(Includes Black Track & Hardware)

Doors are pre-drilled for track hardware



PR-Z Barn Primed Door Kit



KP-Z Barn Knotty Pine Door Kit



Black Hardware consists of:

- 75-7/8" Track
- \bullet Straps
- Handle
- Floor Mounted Door Guides
- Stoppers
- Mounting Hardware

Stock Door Widths

| PR-Z Barn | KP-Z Barn |
|---------------|---------------|
| 3'-0" x 7'-0" | 3'-0" x 7'-0" |


For Sliding Door Hardware see Page 33.

Primed French Doors - Clear Glass





Single-Pane Tempered Clear Glass 6'-8" Height • 1-3/8"



Stock Door Widths

| PR-1501 | PR-1501S |
|----------------------|----------------------|
| 2'-0", 2'-4", 2'-6", | 2'-0", 2'-4", 2'-6", |
| 2'-8", 3'-0" | 2'-8", 3'-0" |

Divided Light Doors Glass is protected by plastic film which is easily removed after finishing.



Stock Door Widths

| PR-1505 | PR-1510 | PR-1515 ♦ | Pantry Door |
|---------------------|-----------------------------|----------------------------|---------------------|
| 1'-6", 2'-0", 2'-6" | 2'-0"•, 2'-6", 2'-8", 3'-0" | 2'-4", 2'-6", 2'-8", 3'-0" | 2'-0", 2'-4", 2'-6" |

6'-8" doors have a 9-1/4" Bottom Rail, 7'-0" doors have 13-1/4" Bottom Rail

♦ Also available 7'-0" height.



Primed French Doors - White Laminate





White Laminate Glass 1-3/4"



Stock Door Widths

| PR-1501 | PR-1501S |
|-----------------------------|-----------------------------|
| (6'-8" & 7'-0" Hts.) | (6'-8", 7'-0" & 8'-0" Hts.) |
| 1'-6", 2'-0", 2'-4", 2'-6", | 1'-6", 2'-0", 2'-4", 2'-6", |
| 2'-8", 3'-0" | 2'-8", 3'-0" |

White Laminate Glass • 6'-8" & 7'-0" Height • 1-3/8"



Stock Door Widths

| PR-1501WL | PR-1501SWL | PR-1503SWL | PR-1510WL | PR-1515WL |
|----------------------|----------------------|----------------------|----------------------|----------------------|
| (6'-8" & 7'-0" Hts.) |
| 1'-6", 2'-0", 2'-4", | 1'-6", 2'-0", 2'-4", | 1'-6", 2'-0", 2'-6", | 2'-0", 2'-6", 2'-8", | 2'-4", 2'-6", 2'-8", |
| 2'-6", 2'-8", 3'-0" | 2'-6", 2'-8", 3'-0" | 2'-8", 3'-0" | 3'-0" | 3'-0" |

 $6^{\text{\tiny{l}}}\text{-}8^{\text{\tiny{l}}}$ doors have a 9-1/4" Bottom Rail, 7'-0" doors have 13-1/4" Bottom Rail

★ 6'-8" doors are cut down from 7'-0" height doors.



Primed Panel Doors - Shaker





Flat Panel • Shaker Sticking 1-3/4"



1-3/4"
Stock Door Widths

PR-11S (6'-8", 7'-0" & 8'-0" ♣ Hts.)


1'-0", 1'-2", 1'-3" 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

PR-22S (6'-8", 7'-0" & 8'-0" ♣ Hts.)

1'-0", 1'-2", 1'-3" 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

♣ 8'-0" 1-3/4" 1'-6" thru 3'-0" only.

Flat Panel • Shaker Sticking • 6'-8" Height • 1-3/8"

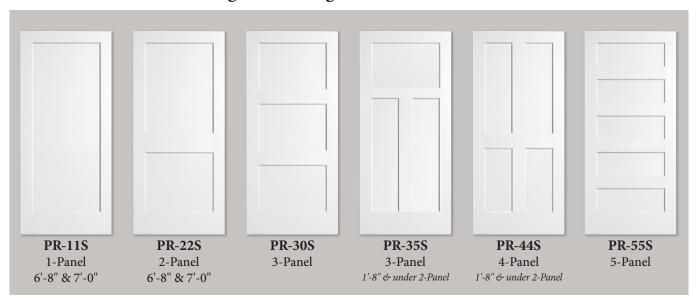


Stock Door Widths

PR-11S PR-22S PR-30S PR-35S PR-44S ♠ PR-55S

1'-0", 1'-2", 1'-3", 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

Primed doors 1'-4" and smaller have narrow stiles, less than 4". 6'-8" & 7'-0" Height Doors have a 9-1/4" Bottom Rail

♠ PR-44S 1'-8" and under 2-Panel PR-22S.




Primed Panel Doors - Ovolo





Flat Panel • Ovolo Sticking 1-3/4"



1-3/4" Stock Door Widths


PR-11 (6'-8" & 7'-0" Hts.)

1'-0", 1'-2", 1'-3" 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

PR-22 (6'-8" & 7'-0" Hts.)

1'-0", 1'-2", 1'-3" 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

Flat Panel • Ovolo Sticking • 6'-8" Height • 1-3/8"

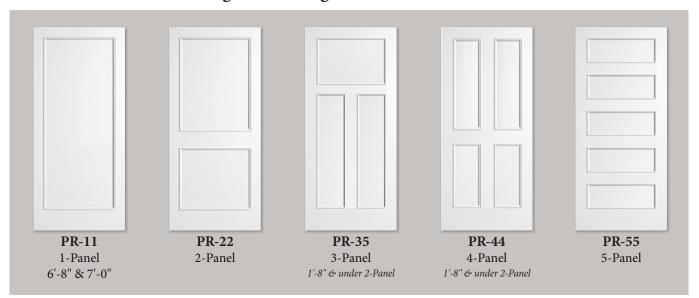

Stock Door Widths

PR-11 PR-22 PR-35 PR-44 ♠ PR-55S

1'-0", 1'-2", 1'-3", 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

Primed doors 1'-4" and smaller have narrow stiles, less than 4". 6'-8" & 7'-0" Height Doors have a 9-1/4" Bottom Rail

♠ PR-44 1'-8" and under 2-Panel PR-22.

Prefinishing available, see page 34 for details.



Built By BROSCO brosco.com

Primed Raised Panel Doors





Raised Panel • Ovolo Sticking

1-3/4"




1-3/4"
Stock Door Widths

PR-22RP (6'-8" & 7'-0" Hts.)

1'-0", 1'-2", 1'-3" 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

Raised Panel • Ovolo Sticking • 6'-8" Height • 1-3/8"

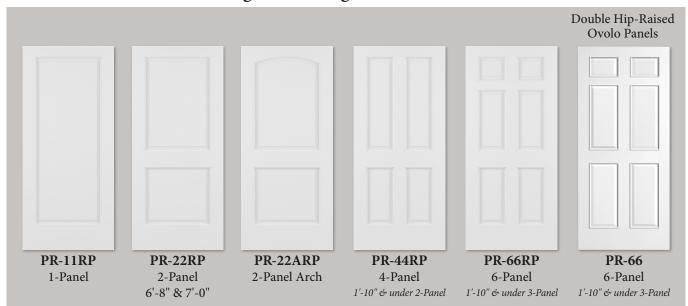


Stock Door Widths

PR-11RP PR-22RP PR-22ARP PR-44RP ♠ PR-66RP PR-66

1'-0", 1'-2", 1'-3", 1'-4", 1'-6", 1'-8", 1'-10", 2'-0", 2'-2", 2'-4", 2'-6", 2'-8", 2'-10", 3'-0"

Primed doors 1'-4" and smaller have narrow stiles, less than 4". 6'-8" & 7'-0" Height Doors have a 9-1/4" Bottom Rail


♠ PR-44RP 1'-10" and under 2-Panel PR-22RP.



Primed Louver Doors – 13/8"




Plantation Louver Doors • 6'-8" Height



Stock Door Widths

| PR-730-PL | PR-732-PL |
|-----------------------------|-----------------------------|
| 1'-6", 2'-0", 2'-4", 2'-6", | 1'-6", 2'-0", 2'-4", 2'-6", |
| 2'-8", 3'-0" | 2'-8", 3'-0" |

Louver Doors • 6'-8" Height



Stock Door Widths

| PR-730 | PR-732 |
|-----------------------------|-----------------------------|
| 1'-6", 2'-0", 2'-4", 2'-6", | 1'-6", 2'-0", 2'-4", 2'-6", |
| 2'-8", 3'-0" | 2'-8", 3'-0" |


Plantation Bifold Doors 6'-8" Height



Stock Bifold Widths


| 000011211010 |
|---------------------|
| PR-2FD-730-PL |
| 2'-0", 2'-6", 3'-0" |
| PR-2FD-730-PL |
| 4'-0", 5'-0", 6'-0" |

1" Bifold Doors 6'-8" Height



Stock Bifold Widths

| PR-2FD-730-1 | PR-2FD-732-1 |
|---------------------|---------------------|
| 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" |
| PR-2FD-730-1 | PR-4FD-732-1 |
| 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" |



Louver Door Profile



Plantation Louver Door Profile


† 4 Door consists of two 2 Door packages.



Primed Bifold Doors – 1³/₈"




Flat Panel • Shaker Sticking • 6'-8" Height

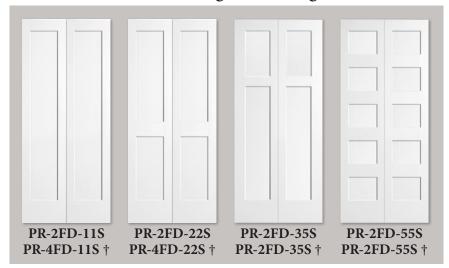

Stock Bifold Widths

| PR-2FD-11S | PR-2FD-22S | PR-35 | PR-55S |
|---------------------|---------------------|---------------------|---------------------|
| 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" |
| PR-4FD-11S | PR-2FD-22S | PR-35 | PR-55S |
| 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" |

Flat Panel • Ovolo Sticking



Stock Bifold Widths

| PR-2FD-11 | PR-2FD-22 |
|---------------------|---------------------|
| 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" |
| PR-4FD-11 | PR-2FD-22 |
| | |

Raised Panel • Ovolo Sticking • 6'-8" Height



Stock Bifold Widths

| PR-2FD-11RP | PR-2FD-22RP | PR-2FD-22ARP | PR-2FD-66RP | PR-2FD-66 |
|---------------------|---------------------|---------------------|---------------------|---------------------|
| 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" | 2'-0", 2'-6", 3'-0" |
| PR-4FD-11RP | PR-4FD-22RP | PR-2FD-22ARP | PR-4FD-66RP | PR-4FD-66 |
| 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" | 4'-0", 5'-0", 6'-0" |

† 4 Door consists of two 2 Door packages.




20 brosco.com Stock Interior Doors

Primed Fire Doors − 1³/4"





Flat Panel • Shaker Sticking • 6'-8" Height • 1-3/4"

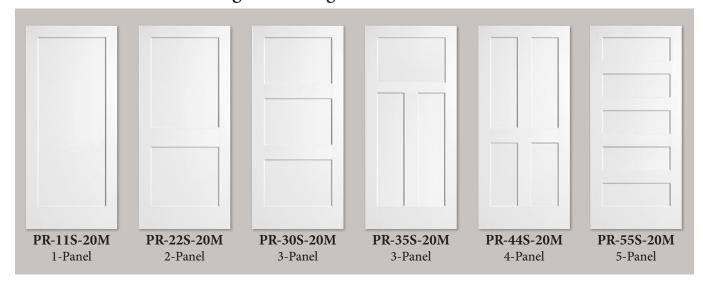

Stock Door Widths

| PR-11S-20M | PR-22S-20M (6'-8" & 7'-0" Hts.) | PR-30S-20M | PR-35S-20M | PR-44S-20M | PR-55S-20M |
|--------------|------------------------------------|--------------|--------------|--------------|--------------|
| 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" |

Flat Panel **Ovolo Sticking**

1-3/4"

Raised Panel • Ovolo Sticking • 6'-8" Height • 1-3/4"



Stock Door Widths PR-22-20M

2'-8", 3'-0"



Stock Door Widths

| PR-11RP-20M | PR-22RP-20M | PR-22ARP-20M | PR-44RP-20M | PR-66RP-20M |
|--------------|--------------|--------------|--------------|--------------|
| 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" | 2'-8", 3'-0" |

Prefinishing available, see page 34 for details.

Built By BROSCO brosco.com

Moulded Doors - 13/8"



Smooth Surface • Raised Panel



Cove & Bead Sticking 1'-8" & under 3-Panel



Rockport® Cove & Bead Sticking



Santa Fe® Ovolo Sticking



Carrara® Cove & Bead Sticking



Caiman® Cove & Bead Sticking



Continental™ Ovolo Sticking


Textured Surface • Raised Panel



Colonist® Textured Cove & Bead Sticking 1'-8" & under 3-Panel



Camden® Cove & Bead Sticking







Prefinishing available, see page 34 for details.





Fire rated doors available, please inquire.



22 brosco.com Stock Interior Doors

Moulded Doors - 13/8"




Smooth Surface • Flat Panel



Stock Door Widths

| Door Design | | | | |] | 1-3/ | '8 " | Ho | llo | w C | Cor | e | | | | | | | | 1- | 3/8' | " Sc | olid | l C | ore | | | | |
|-----------------------|------|------|------|------|------|------|-------------|-------|------|------|------|------|------|-------|------|------|------|------|------|------|------|-------|------|------|------|------|------|-------|------|
| Door Design | | 1'0" | 1'2" | 1'3" | 1'4" | 1'6" | 1'8" | 1'10" | 2'0" | 2'2" | 2'4" | 2'6" | 2'8" | 2'10" | 3'0" | 1'0" | 1'2" | 1'3" | 1'4" | 1'6" | 1'8" | 1'10" | 2'0" | 2'2" | 2'4" | 2'6" | 2'8" | 2'10" | 3'0" |
| D: 1 1 1 8 | 6'8" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| Birkdale [®] | 7'0" | | | | | | | | | | | | | | | | | | | × | X | × | × | × | X | × | X | X | X |
| Caiman® | 6'8" | × | X | × | X | × | × | X | X | X | × | X | X | X | X | X | X | × | × | × | X | × | × | X | X | × | X | X | X |
| Camden® | 6'8" | | | | | × | × | | X | X | X | X | X | | X | | | | | × | X | | × | | X | × | X | | X |
| | 6'8" | X | X | X | X | × | × | X | X | X | × | X | X | X | X | X | X | × | × | × | X | X | × | × | X | × | X | X | X |
| Carrara® | 7'0" | X | | X | X | × | × | | X | | X | X | X | X | X | X | X | × | × | × | X | X | × | X | X | × | X | X | X |
| | 8'0" | | | | | | | | | | | | | | | | | | | X | X | | × | | X | X | X | | X |
| Santa Fe® | 6'8" | X | X | × | X | X | × | X | X | X | X | X | X | X | X | X | X | X | × | × | X | X | × | X | X | × | X | X | X |
| Colonist® | 6'8" | × | × | × | X | × | × | X | X | X | × | X | X | X | X | X | × | × | × | × | X | × | × | × | X | × | X | X | X |
| Smooth | 7'0" | × | | × | X | × | × | | X | | X | X | X | X | X | ĺ | | | × | × | X | × | × | X | X | × | X | X | X |
| Colonist® Textured | 6'8" | × | x | x | x | x | × | x | x | x | x | x | x | x | x | x | x | × | x | × | x | x | × | × | x | × | x | x | x |
| C | 6'8" | X | X | X | X | × | × | X | X | X | × | X | X | X | X | X | × | × | × | × | X | X | × | × | X | × | X | X | X |
| Conmore® | 7'0" | | | | | | | | | | | | | | | | | | | × | X | X | × | X | X | × | X | X | X |
| Continental™ | 6'8" | X | X | X | X | X | × | X | X | X | X | X | X | X | X | X | X | X | × | × | X | X | × | X | X | X | X | X | X |
| C G IIIIM | 6'8" | × | X | | X | X | × | X | X | X | X | X | X | X | X | X | X | | × | × | X | × | × | X | X | × | X | X | X |
| Craftsman III™ | 7'0" | | | | | | | | | | | | | | | | | | | × | X | × | × | X | X | × | X | X | X |
| | 6'8" | X | X | X | X | X | × | X | X | X | X | X | X | X | X | X | X | X | × | X | X | X | × | X | X | X | X | X | X |
| Madison* | 7'0" | | | | | | | | | | | | | | | | | | | X | X | X | X | X | X | X | X | X | X |
| | 8'0" | | | | | | | | | | | | | | | | | | | × | X | × | × | X | X | X | X | X | X |
| M 8 | 6'8" | × | X | × | X | × | × | X | X | X | X | X | X | X | X | X | × | × | × | × | X | × | × | × | X | × | X | X | X |
| Monroe [®] | 7'0" | | | | | | | | | | | | | | | | | | | X | X | X | × | X | X | × | X | X | X |
| Rockport* | 6'8" | | | | | × | X | | X | | × | X | X | | X | | | | × | X | × | × | × | × | X | × | X | X | X |
| Studio SL100 | 6'8" | | | | | | | | | | | | | | | | | | | × | | | × | | × | × | × | | × |
| Studio SL130 | 6'8" | | | | | | | | | | | | | | | | | | | × | | | × | | X | × | X | | X |

Prefinishing available, see page 34 for details.



6'-6" heights available, please inquire.

Moulded Doors – 1³/₄"



Smooth Surface • Raised Panel



Colonist® Smooth Cove & Bead Sticking 1'-8" & under 3-Panel



Carrara® Cove & Bead Sticking



Caiman® Cove & Bead Sticking



Santa Fe® **Ovolo Sticking**



Continental™ Ovolo Sticking

Textured Surface Raised Panel

Smooth Surface • Flat Panel







Colonist® Textured Cove & Bead Sticking 1'-8" & under 3-Panel



Madison® Craftsman Sticking



Craftsman Sticking 11-1/2" Bottom Rail



Craftsman Sticking 11-1/2" Bottom Rail



Craftsman III™ Craftsman Sticking




Conmore® Stepped Sticking

| 1-3/4" Stock Door Widths | | | | | | | | | | | | | |
|--------------------------|--------------|---|------------|---|---|------------|------|--|--|--|--|--|--|
| Door Design | Door Design | | Solid Core | | | | | | | | | | |
| Door Design | D001 D001511 | | | | | 2'8" | 3'0" | | | | | | |
| Birkdale® | 6'8" / 7'0" | X | × | × | × | × | X | | | | | | |
| Caiman® | 6'8" | | × | × | × | × | X | | | | | | |
| Calman | 7'0" | × | × | × | × | × | X | | | | | | |
| Carrara® | 6'8" / 7'0" | × | × | × | × | × | X | | | | | | |
| Carrara | 8'0" | | × | × | × | 2'8" X X | X | | | | | | |
| Santa Fe® | 6'8" | | | × | × | × | X | | | | | | |
| Colonist® Smooth | 6'8" / 7'0" | × | × | × | × | × | X | | | | | | |
| Colonist® Textured | 6'8" / 7'0" | × | × | × | × | × | X | | | | | | |
| Conmore* | 6'8" | × | X | X | X | × | × | | | | | | |

| Solid Core | | | | | | | | | | | | |
|------------|------|------|------|------|------|--|--|--|--|--|--|--|
| 1'6" | 2'0" | 2'4" | 2'6" | 2'8" | 3'0" | | | | | | | |
| X | X | × | × | × | × | | | | | | | |
| | × | × | × | × | X | | | | | | | |
| X | × | × | × | × | X | | | | | | | |
| X | × | × | × | × | X | | | | | | | |
| | × | × | × | × | X | | | | | | | |
| | | × | × | × | X | | | | | | | |
| × | × | × | × | × | X | | | | | | | |
| X | × | × | X | × | X | | | | | | | |

| 1-3/4" Stock Door Widths | | | | | | | | | | |
|----------------------------|-------------|------|------|------|------|------|------|--|--|--|
| Door Design | Solid Core | | | | | | | | | |
| Door Design | | 1'6" | 2'0" | 2'4" | 2'6" | 2'8" | 3'0" | | | |
| Continental™ | 6'8" | | × | × | × | X | × | | | |
| Continental | 7'0" | × | × | | × | | | | | |
| Craftsman III [™] | 6'8" | | × | × | × | X | × | | | |
| Madison* | 6'8" / 7'0" | × | × | × | × | X | × | | | |
| Monroe [®] | 6'8" / 7'0" | X | X | X | X | × | × | | | |

Prefinishing available, see page 34 for details.





Fire rated doors available, please inquire.

Moulded Bifolds – 1³/8"



Smooth Surface • Raised Panel • 6'-8" Height



Colonist® Smooth Cove & Bead Sticking



Carrara® Cove & Bead Sticking



Caiman® Cove & Bead Sticking



Santa Fe® Ovolo Sticking



Continental[™] Ovolo Sticking



Rockport® Cove & Bead Sticking

Smooth Surface • Flat Panel • 6'-8" Height



Madison® Craftsman Sticking



Monroe® Craftsman Sticking



Birkdale® Craftsman Sticking



Craftsman III™ Craftsman Sticking



Conmore® Stepped Sticking

Textured Surface • Raised Panel • 6'-8" Height



Colonist® Textured Cove & Bead Sticking



Camden® ★ Cove & Bead Sticking

★ Camden Solid Core Bifolds non-stock.

Stock Bifold Widths

Hollow Core

Colonist Textured, Colonist Smooth, Craftsman III

B-2FD: 2'-0", 2'-4", 2'-6", 2'-8", 3'-0" B-4FD †: 4'-0", 5'-0", 6'-0"

Birkdale, Santa Fe, Camden, Rockport, Madison, Conmore, Monroe

B-2FD: 2'-0", 2'-6", 3'-0" B-4FD †: 4'-0", 5'-0", 6'-0"

Solid Core All Bifold Designs ★

B-2FD: 2'-0", 2'-6", 3'-0" B-4FD †: 4'-0", 5'-0", 6'-0"

6'-6" heights available, please inquire. † 4 Door consists of two 2 Door packages.

Flush Doors





Flush Doors









| uan | Birch | Oak | Primed Hardboard |
|-----|-------|-----|------------------|
| | | | |

| Door D | esian | | 1-3/8" Hollow Core 1'0" 1'2" 1'3" 1'4" 1'6" 1'8" 1'10" 2'0" 2'2" 2'4" 2'6" 2'8" 2'10" 3'0" 1'0" | | | | 1-3/8" Solid Core | | | | | | | | | | | | | | | | | | | | | | |
|--------|------------|------|---|---|---|-------|-------------------|------|------|------|------|------|------|-------|------|------|------|------|------|-------|------|---|---|---|---|---|---|---|---|
| Door D | Coigii | 1'0" | | | | 2'10" | 3'0" | 1'0" | 1'2" | 1'3" | 1'4" | 1'6" | 1'8" | 1'10" | 2'0" | 2'2" | 2'4" | 2'6" | 2'8" | 2'10" | 3'0" | | | | | | | | |
| | 6'0" | | | | | | | | X | | X | X | | | | | | | | | | | | | | | | | |
| Lauan | 6'4" | | | | | | | | | | X | X | | | | | | | | | | | | | | | | | |
| | 6'6, 6'8" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 6'0" | | | | | | | | X | | | X | | | | | | | | | | | | | | | | | |
| Birch | 6'6, 6'8" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 7'0" | X | | | | X | X | | X | | X | X | X | X | X | | | | | X | X | X | X | | X | X | X | | X |
| Oak | 6'6", 6'8" | | | | | | | | X | | X | X | X | | × | | | | | | | | X | | X | × | X | | X |
| | 6'6', 6'8" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | × |
| Primed | 7'0" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 0'0" | | | | | | | | | | | | | | | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |

| Door Design | | 1-3/4" Hollow Core | | | | | 1-3/4" Solid Core | | | | | | | | | |
|-------------|-------|--------------------|------|------|------|------|-------------------|-------|------|------|------|------|------|-------|------|--|
| Door Do | coign | 2'0" | 2'6" | 2'8" | 3'0" | 1'6" | 1'8" | 1'10" | 2'0" | 2'2" | 2'4" | 2'6" | 2'8" | 2'10" | 3'0" | |
| Lauan | 6'8" | × | × | × | × | | | | × | | × | × | × | × | × | |
| D:1. | 6'8" | | X | × | × | | | | | | | × | × | | × | |
| Birch | 7'0" | | | | | | | | | | | × | × | | × | |
| D J | 6'8" | | | | | | | | × | | × | × | × | | × | |
| Primed | 7'0" | | | | | | | | | | | | | | × | |

1-3/8" Flush Bifold Doors • 6'-8" Height



B-2FD-LAUAN B-4FD-LAUAN † B-4FD-BIRCH † Hollow Core



B-2FD-BIRCH Hollow Core



B-2FD-OAK Hollow Core



B-2FD-PRIMED B-4FD-OAK † B-4FD-PRIMED † Hollow Core





Stock Bifold Widths

B-2FD-LAUAN */B-2FD-BIRCH * **B-2FD-OAK**

2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

B-2FD-PRIMED

2'-0", 2'-6", 3'-0"

B-4FD-LAUAN ★/B-4FD-BIRCH ★ B-4FD-OAK / B-4FD-PRIMED


4'-0", 5'-0", 6'-0"

★ Also available in 6'-6" height. † 4 Door consists of two 2 Door packages.

Straddle Lights



Flush Doors • Solid Core • Single Thick Tempered Safety Glass

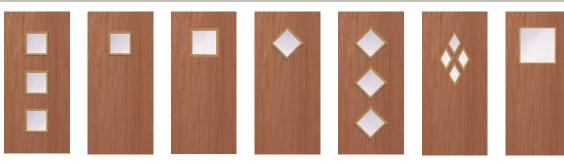

| Design 1 ³ / ₄ " | A | В | G | F | FFF | CD | K |
|--|---------|---------|---------|---------|---------|-------|---------|
| Design 13/8" | A138 | B138 | G138 | F138 | FFF138 | - | K138 |
| Size | 10 x 10 | 10 x 10 | 12 x 12 | 10 x 10 | 10 x 10 | 6 x 7 | 20 x 20 |
| Min. Slab Width | 1'-6" | 1'-6" | 1'-8" | 1'-10" | 1'-10" | 2'-4" | 2'-4" |



| Design 13/4" | D | M | L | 00 * | 000 | Q 🏕 | RR 💠 |
|-----------------|---------|---------|---------|-------|-------|--------|--------|
| Design 13/8" | D138 | M138 | L138 | _ | _ | _ | _ |
| Size | 20 x 24 | 24 x 30 | 24 x 36 | 6 x 7 | 6 x 7 | 6 x 10 | 6 x 10 |
| Min. Slab Width | 2'-4" | 2'-8" | 2'-8" | 3'-0" | 3'-0" | 3'-0" | _ |



| Design 13/4" | S * | T | I * | Н 💠 | J * |
|-----------------|------------|--------|------------|--------|------------|
| Size | 10 x 6 | 6 x 10 | 4 x 24 | 5 x 20 | 6 x 36 |
| Min. Slab Width | 2'-8" | 3'-0" | _ | - | _ |

Door units with Designs OO, Q, RR, S, I, H or J, the lower light or individual light is positioned on the knob side, unless hinge side is specified.



from bottom of door unless

otherwise specified.

Mirror Doors






Impression Mirror Door • 6'-8" Height



Beveled Mirror one side



Colonist Textured reverse side

With the Impression™ mirror door, seeing is believing. Its large, inset mirror creates the effect of extra space and larger, brighter rooms. Whether in small bathrooms, bedrooms, or narrow hallways, this design adds beauty and dynamic functionality. The reverse side features the Colonist® textured design.



Stock Door Widths

Impressions Mirror Door

2'-0", 2'-4", 2'-6", 2'-8", 3'-0"

brosco.com Stock Interior Doors

Transom Sash & Direct Set



Transom Sash

- Single-Pane Tempered Glass
- Authentic Divided Light
- Transom is Clear Fir or Pine
- All Transoms 12" high x 1-3/8" Thick







3-Light (shown in pine)



4-Light (shown in pine)




5-Light (shown in pine)

| Transom Sash Dimension | Lights | Simpson Fir | Rogue Valley Pine |
|--|--------|----------------|----------------------|
| 2'-6" for Single Door | 3 | F-4713 | P-31 |
| 2'-8" for Single Door | 3 | F-4713 | P-31 |
| 3'-0" for Single Door | 3 | F-4713 | P-31 |
| 4'-0 ¹⁵ / ₁₆ " for Double Door | 4 | F-4714 | P-41 |
| 5'-0 ¹⁵ / ₁₆ " for Double Door | 5 | F-4715 | P-51 |
| 6'-0 ¹⁵ / ₁₆ " for Double Door | 5 | F-4715 | P-61 |

Direct Set Glazing Transoms



- 4-9/16" or 6-9/16" Clear Pine or Finger-Joint Primed Jamb
- Simulated Divided Light 1-1/4" Non-Removable Wood Grilles – applied 2 sides
- Laminated Safety Glass 1/4"
- Standard Transom is 12" in height
- Single Doors (3 Lt): 2-4, 2-6, 2-8, 3-0
- Double Doors* (4 Lt): 4-0
- Double Doors* (5 Lt): 5-0, 5-4, 6-0



*Specify if with astragal.

Built By BROSCO brosco.com

Pocket Door Frame



ECLISSE Classic Collection Pocket Door Frame



ECLISSE Pocket Door Frames offer a complete pocket door system - galvanized steel frame kit with patented removable track so you never have to break drywall again making potential future maintenance a far less costly and a much quicker task.

- 1-3/8" or 1-3/4" Doors
- 220 lbs. Door Weight
- Galvanized Steel Frame
- Patented Removable Track
- Pre-drilled Horizontal Bars
- Easy Assembly
- Door Guide Built into Frame
- 12-Year Warranty
- Ball Bearing Guide

| | Complete Pocket Door Frame Kit | Split Kit Horizontal Bars onl (Includes Header, Track & Floor G | | | | | |
|----------------|--------------------------------------|---|--------|--|--|--|--|
| Width: | 4-5/8" | 4-5/8" | 6-5/8" | | | | |
| 2'-0" x 6'-8" | 1 | 1 | 1 | | | | |
| 2'-2" | _ | ✓ | _ | | | | |
| 2'-4" | 1 | 1 | 1 | | | | |
| 2'-6" 2'-8" | ✓ | ✓ | 1 | | | | |
| 2'-8" | 1 | 1 | 1 | | | | |
| 2'-10" | ✓ | ✓ | ✓ | | | | |
| 3'-0" | ✓ | ✓ | 1 | | | | |
| 3'-6" | _ | 1 | _ | | | | |

| | Split Kit – Vertical Bars only | | | | | | | | | | |
|----------------|--------------------------------|--------|--|--|--|--|--|--|--|--|--|
| Height:* | 4-5/8" | 6-5/8" | | | | | | | | | |
| 6'-6" | ✓ | _ | | | | | | | | | |
| 6'-8" 7'-0" | ✓ | ✓ | | | | | | | | | |
| 7'-0" | ✓ | ✓ | | | | | | | | | |
| 8'-0" | / | ✓ | | | | | | | | | |

| 7'-0" & 8'-0" Jamb Kits | | | | | | | | | |
|-------------------------|------------------|------------------|------------------|--|--|--|--|--|--|
| | Single 4-5/8" | Double 4-5/8" | Single 6-5/8" | | | | | | |
| Primed | 1 | ✓ | ✓ | | | | | | |
| Stain Grade Wood ✓ – – | | | | | | | | | |






The ECLISSE galvanized steel frame kit for stud walls consists of horizontal bars and vertical reinforced bars, closed at the top by a header, where the track is installed. The result is a sturdy and reliable structure.

| Accessories |
|---|
| Push Pull |
| Soft Close One Direction |
| Soft Close Bi-Direction (2-4 doors & larger) |
| Self Close ♦ (Max. 100 lb. door) |
| 8'-0" Wire Channel for 6-5/8" |
| Double Door Coordinator 😂 |
| Double Door Joining Kit (required) |
| 42" Guide Bar (required for double doors) (5/8" route required on bottom of door) |

Pocket Door Frame



ECLISSE® Systems and Accessories





ECLISSE Single

ECLISSE Double



| ECLISSE® Classic Collection | Push & Pull | Soft Close One Direction | Soft Close Bi-Directional | Self Closing System | Wire Channel | | Joining Kit for Double Door | 42" Guide Bar |
|-----------------------------|-------------|-----------------------------|------------------------------|------------------------|--------------|---|--------------------------------|------------------|
| Single 4-5/8" | 1 | 1 | 1 | 1 | | | | √ |
| Double 4-5/8" | 1 | 1 | 1 | | | 1 | 1 | ✓ |
| Single 6-5/8" | 1 | 1 | 1 | 1 | 1 | | | √ |
| Double 6-5/8" | 1 | 1 | 1 | | 1 | ✓ | ✓ | / |

Self Closing System must be used with Soft Close one direction.

Soft Close Bi-Directional can only be used by itself. *Works with frame kits 2'-4" and larger (Not compatible with 2'-0" or 2'-2").

Push & Pull can be used alone or with Soft Close one direction only.

Double Door Coordinator Kit must be used with Soft Close one direction. Wire Channel profile suggested on Doubles.

Height is based on Finished Floor NOT Subfloor


ECLISSE® Double Pocket Door

Select Frame Kit Size

QTY: 2 FRAME KITS REQUIRED TO MAKE A DOUBLE

Frame Kit includes everything you need to create the pocket, patented removable track, runner kit and all parts and pieces required to hang the door.

Helpful Tip: The frames are not meant to be cut down or altered so the frame kit size purchased should be the same size as the door panel size being used on the opening.



Required Add-Ons

JOINING KIT – To make a double you will need Qty: 2 Frame Kits and the Joining Kit.

QTY: 2 42" GUIDE BARS – To be installed at the bottom of the door.

Helpful Tip: The reason this is required is because there is enough room inside the pocket that when the door is in the fully closed position, the Guide Bars will hold onto the door guide at the bottom of the door (which stabilizes the door).

SUGGESTED Add-On Double Door Jamb Kit

JAMB KIT AVAILABLE IN PRIMED AND STAIN GRADE We have 4-5/8" and 6-5/8" wall Double Jamb Kits in 7'-0" and 8'-0". The Jamb Kit is to be cut down based on your opening size.

Add-On Optional Accessories

OPTION 1: DOUBLE DOOR COORDINATOR AND SOFT CLOSER ONE DIRECTION

Qty: 1 Double Door Coordinator Kit and Qty: 1 Soft Closer One Direction.

Helpful Tip: The reason only one Soft Closer is required is because the Double Door Coordinator Kit connects the two doors.

OPTION 2: SOFT CLOSER ONE DIRECTION OR SOFT CLOSER BI-DIRECTION

If you want the doors to work independently of each other, you can use the Soft Closer one direction or the Soft Closer Bi-Direction on each door.

OPTIONAL ADD-ON FOR 6-5/8" WALL FRAME KITS ONLY: WIRE CHANNEL KIT

Compatible with the 6-5/8" wall frame kits only. Add-on metal channel that allows for wiring in the same wall where the frame is placed. You can have up to 2 Kits for 6-5/8" wall frame kit so on double systems you can have up to 4 Kits total.

Built By BROSCO brosco.com

Pocket Door Hardware



HAGER Premium Pocket Door Frame

- 1-3/8" or 1-3/4" Commercial Series
- Model 9631 3'-0" x 6'-8" & Model 9629 3'-0" x 8'-0"
- Heavy Duty up to 150 lbs.
- V-Groove Jump Proof Aluminum Track



- Smooth 4-Wheel Hanger
- Pre-assembled Header for Faster Installation
- Steel Encased for Rigidity

Soft Closer available up to 150 lbs.

Series 1500 Space-Saver Pocket Sliding Door Frame – K.D.

- For 1-3/8" or 1-3/4" ♣ Thick Doors
- For Doors up to 3'-0" x 8'-0" (weight capacity 200 lbs.), 3'-0" x 6'-8" weight capacity 125 lbs.
- Removable Track
- Tricycle Hangers
- PF616 Junction Hardware Kit available.

| Rough Opening | | | | | |
|--------------------|-------------------------|--|--|--|--|
| Width (Single) | Door times 2 plus 1" | | | | |
| Width (Bi-Parting) | Door times 4 | | | | |
| Height | Door Height plus 4-1/2" | | | | |

Model 1050SOFT - Soft Close Pocket Door Hardware

- Minimum Width one direction 24", Bi-directional 28"
- Works in conjunction with Johnson Hardware: 100PD, 100SD, 134F, 138F, 1500, 1560, 1562, 2610F, 2710
- Prevents pinching



Wall Mount Sliding Door Track & Hardware

This commercial-grade, heavy-duty wall mounted hardware is ideally suited for applications where the installation of a pocket door is not structurally possible or not cost effective.

• For 1-3/8" or 1-3/4" thick doors up to 200 lbs. each



Track Color #2610F72H Aluminum Finish #2610F72B Dark Bronze Finish



#12 Standard Floor Guide (included)



#2031 Concealed Floor Guide (optional)

Pocket Door Pulls

- Available in Satin Nickel (US15)
- Standard 2-1/8" Bore, 2-3/8" Backset



Privacy Locked and unlocked by emergency tool outside and thumbpiece inside.



Passage Deep cups for easy access on passage doors.

Combination Pulls -

Plate Size: 2-3/4" x 2-1/2"

Door Edge Cut-out Required: 2-1/4" x 1-3/4"

• Available in Bright Brass (US3), Satin Nickel (US15), Brass/Chrome (US3/US26), Antique Brass (US5) and Oil-Rubbed Bronze (US10B)



For 1-3/8" or 1-3/4" thick doors.



Kwikset

For 1-3/8" thick doors.

② 1-3/4" application requires optional 1-3/4" floor plates.

32 Stock Interior Doors brosco.com

Wall Mount Sliding Door Hardware



Liberty barn door hardware can accommodate up to 250 lbs. in door weight, and offers a smooth, silent stop for your sliding barn door. The set includes all mounting hardware, and hanging components needed for one door to transform your space.

- Metal Construction
- 1-3/8" or 1-3/4"
- Maximum Door Weight 250 Lbs
- Flat Track Rail Standard 78-3/4", optional 96"
- Matte Black (Powder Coated) and Satin Nickel



Top Mount Sliding Door Hardware Kit

BDRTOPMOUNT78SS

Stainless Steel



Bent Strap Sliding Door Hardware Kit

BDBENTSTRAP78MB

Black

BDBENTSTRAP78SN

Satin Nickel





6-1/2" Finger Pull BDFLPULL-MB Black



Barn Door Handle
BDHANDLE-MB
Black



2-1/8" Round Pull **400510** Black





Soft Close System
Soft Close Kit for Flat Track Rails
BDSOFTCLOSEMB80
Black



Joint Connector
Flat Rail Joint Connector with Screws
KITJOINERMB
Black



Kit Includes:

- 1 Hangers Set (pair)
- 2 Track Stoppers
- 5 Rail Mounting Clamps for Rail Size
- 1 Flat Track Rail, Length 78-3/4" or 96"
- 1 Floor Bottom Guide
- Mounting Screw Pack



96" Track Only BD96TRACKMB Black



Floor Guides
INTFLRMINTGUIDE
Black



Bypass Hardware Brackets
BDBYPASS96MB

Black
BDBYPASS96SN
Satin Nickel

It is recommended to use five of the Bypass Hardware Brackets for standard opening. These are to be used in conjunction with two of the kits with the 78-3/4" tracks.

Prefinishing



Choose the perfect finish and let us do the work!



Our process begins with a dust-free, rigorously inspected unfinished door followed by multi-coat paint application, baked on at every step. The result is a finish as durable as it is beautiful.



Finishing a door in the field can squander valuable time and energy. Let BROSCO do the heavy lifting. Simply choose the paint color and we'll take care of the rest.



The possibilities are wide open with numerous contemporary paint colors and stains at your fingertips.



PAINT COLORS (Available on primed and moulded doors)

Our precise meticulous process ensures exceptional quality and saves you valuable time and money.



WOODVIEW FINISH OPTIONS (Available on select moulded doors)





Chocolate





Enjoy the look of real wood with our premium finishing process. The illusion of real wood emanates through the rich two tone color process that makes each door unique and visually stunning.

STATEMENT COLOR OPTIONS (Available on select moulded doors)

Style meets substance in five cutting edge and unique finishes. Each design goes through a multi coat process to ensure a smooth richness and depth you won't find anywhere else.











Black Cherry

Variances in photography and printing may cause the finish colors shown to vary from the actual finishes.

34 brosco.com Stock Interior Doors

Hinge Options



Hinges available in Plain Bearing, Ball Bearing and Spring; Radius and Square.



| | | BROSCO | | | | | EM | BALDWIN | |
|--------------------------|--------|--------|----------|--------|--------------|--------|----------|--------------|----------|
| | | Stan | Standard | | Ball Bearing | | Standard | Ball Bearing | Standard |
| HINGE OPTIONS: | | Radius | Square | Radius | Square | Radius | Square | Square | Square |
| Antique Nickel | US15A | 1 | 1 | 1 | 1 | _ | - | _ | - |
| Antique Brass | US5 | 1 | 1 | 1 | 1 | _ | _ | _ | 1 |
| Antique Bronze Lacquered | US10A | 1 | _ | _ | _ | - | - | _ | _ |
| Black (Flat Black) | US1D | 1 | 1 | 1 | _ | 1 | - | _ | _ |
| Bright Brass Plated | US3 | 1 | 1 | 1 | 1 | _ | 1 | 1 | - |
| Bright Brasstone | 3LB | 1 | _ | _ | _ | _ | _ | _ | _ |
| Colonial Bronze | US10BD | 1 | 1 | 1 | _ | _ | _ | _ | _ |
| Dark Bronze | US10R | 1 | 1 | 1 | / | / | _ | _ | _ |
| Flat Black | US19 | - | _ | _ | _ | _ | ✓ | 1 | _ |
| French Antique | | _ | _ | _ | _ | _ | ✓ | 1 | _ |
| Life Solid Brass | - | - | _ | _ | _ | _ | _ | _ | 1 |
| Oil Rubbed Bronze | US10B | _ | _ | _ | _ | _ | ✓ | 1 | 1 |
| Polished Chrome | US26 | 1 | 1 | 1 | / | _ | ✓ | 1 | 1 |
| Primed | USP | 1 | _ | _ | _ | _ | _ | _ | _ |
| Satin Brass | US4 | 1 | _ | _ | _ | _ | _ | _ | _ |
| Satin Chrome | US26D | 1 | 1 | 1 | / | _ | _ | _ | _ |
| Satin Nickel | US15 | 1 | 1 | 1 | / | / | ✓ | 1 | 1 |
| Solid Brass | A-US3 | 1 | _ | _ | _ | _ | _ | _ | _ |
| Stainless Steel | US32D | 1 | _ | _ | _ | _ | - | _ | - |
| Zinc | US2C | 1 | _ | _ | _ | _ | _ | _ | _ |
| Zinc Dichromate | US2D | 1 | _ | _ | _ | / | - | _ | _ |

Ball Catch – Bright Brass Plated, Antique Brass, Dark Bronze, Flat Black, Satin Nickel, Polished Chrome, Satin Chrome Roller Catch – Bright Brass Plated, Antique Brass, Dark Bronze, Satin Nickel, Antique Nickel, Polished Chrome, Satin Chrome Concealed Magnetic Catch

Images shown are for color representation only. Variances in photography and printing may cause the finish colors shown to vary from the actual finishes.

Basic Set-Up Unit



Set-up Door Unit

BROSCO offers the widest selection of optional jambs and casing in the industry. Primed, Clear Pine, Primed Poplar, Oak & Fir Set-Up Units are among our common stock species. We take pride in our quality craftsmanship and superior service.

Features of a BROSCO Basic Set-up Door Unit:

Door: 1-3/8" Interior Door - completely machined 3-1/2" x 3-1/2" Hinges - Bright Brasstone 1-1/2 pair on single door, 3 pair on double door

Frame: Clear Pine Split Jamb - 4-3/8" to 4-7/8" wall (drywall) or Clear Pine Veneered Flat Board Jamb with Bullnose or Colonial Stop applied - 4-9/16" wall

Casing: Clear Pine 8710 or 8730 - 2-1/2" (2 sides)

Lockset Preparation: 2-1/8" Facebore, 2-3/8" Backset, 1" x 2-1/4" Edge prep.

| Top of Door to Center of Bore |
|-------------------------------|
| I |
| |

| 6'-8" | = 44-1/16" |
|-------|------------|
| 7'-0" | = 48-1/16" |
| 8'-0" | = 60-1/16" |

| ROUGH OPENING | | | | | | | |
|----------------|----------------------|-----------------------|--|--|--|--|--|
| SINGLE DOOR | | | | | | | |
| Jamb Type | Add to Door Width | Add to Door Height | | | | | |
| Split | 2-1/2" | 2-1/2" | | | | | |
| Flat Board | 2-1/4" | 2-1/2" | | | | | |
| 5/4 Flat Board | 3-1/4" | 2-7/8" | | | | | |
| Solid Rabetted | 2-1/2" | 2-1/2" | | | | | |
| DOUBLE DOOR | | | | | | | |
| With Astragal | 3-1/2" | 2-1/2" | | | | | |
| No Astragal | 2-3/4" | 2-1/2" | | | | | |

Interior Doors 13/4" Thick are also available


How-to-Order

Specify the following when ordering:

- 1. Door design number, quantity and size.
- Determine swing (see handing below).
- Type of astragal if any (double door)
- Type of jamb, specie and wall thickness.
- Type of casing and 1 or 2 sides, applied/K.D.
- Hardware options.
- Specify louver slant room or closet (if applicable)

Handing

When the door opens to you and the knob is on the left hand side, it is a LEFT HAND DOOR. When the knob is on the right, it is a RIGHT HAND DOOR.



BROSCO Pre-Assembled Casing



BROSCO Interior Casing is offered in a wide variety of profiles, species and sizes.


- Split Jamb Units Casing applied to both sides.
- Flat Board or Solid Rabbeted Jamb Units -Casing is Pre-Assembled for easy shipping.
- Casing sets available.
- Mitered joints are "Back-Stitched" with metal fasteners.
- Glued miters are available as an option.
- Mitered, knocked-down casing sets available.

Save time by having your sets of casing **BUILT BY BROSCO**



Jamb Details

Door Height



Colonial Stop

Casing Not Applied **Bullnose Stop**

Flat Board Jamb

(with stop applied)


Iamb

Door

Bullnose Stop




All Jambs to Subfloor



Double Rabbeted Jamb Iamb

Casing Not Applied



36 brosco.com Stock Interior Doors

Options



Single & Double Door Unit Options for 1-3/8" Doors

| | CLEAR PINE | | PRIMED (FJ) | | | CLEAR FIR & OAK | | | PRIMED SOLID POPLAR | | | |
|--|------------|----------|-------------|-------|-------|-----------------|-------|----------|------------------------|-------|-------|-------|
| Split Jamb: | 6'-8" | 7'-0" | 8'-0" | 6'-8" | 7'-0" | 8'-0" | 6'-8" | 7'-0" | 8'-0" | 6'-8" | 7'-0" | 8'-0" |
| Narrow Wall Split 31/2" to 41/16" | _ | _ | - | 1 | - | - | - | - | _ | _ | _ | - |
| Drywall Split 4 ³ / ₈ " to 4 ⁷ / ₈ " | Standard | _ | _ | 1 | 1 | - | _ | _ | _ | _ | _ | - |
| Plaster Wall Split 45/8" to 53/16" | 1 | - | - | 1 | - | - | - | - | - | _ | _ | - |
| Extra Wide Wall Split 65/8" to 71/4" | 1 | _ | _ | 1 | _ | - | _ | _ | _ | _ | _ | - |
| Rabbeted Jamb: | | | | | | | | | | | | |
| 35/8" Single Rabbeted | 1 | - | - | - | - | - | - | - | - | - | - | - |
| 45/8" Single Rabbeted | 1 | 1 | 1 | ✓ | _ | _ | _ | _ | _ | _ | _ | - |
| 45/8" Double Rabbeted * | 1 | 1 | 1 | 1 | 1 | 1 | 1 | Fir | Fir | 1 | 1 | 1 |
| 4 ⁷ / ₈ " Double Rabbeted * | 1 | 1 | 1 | 1 | 1 | 1 | _ | _ | _ | _ | _ | - |
| 51/4" Double Rabbeted * | 1 | 1 | - | ✓ | - | - | - | - | - | - | - | - |
| 65/8" Double Rabbeted * | _ | _ | _ | - | - | - | - | - | _ | 1 | 1 | / |
| 69/16" Single/Double Rabbeted ** | 1 | 1 | - | 1 | 1 | 1 | 1 | Fir | Fir | _ | _ | - |
| 6 ⁷ / ₈ " Double Rabbeted * | _ | _ | _ | 1 | 1 | 1 | _ | _ | _ | _ | _ | - |
| 71/4" Single Rabbeted (13/4" Doors only) | 1 | 1 | - | - | - | - | - | - | - | _ | _ | - |
| 81/8" Single Rabbeted | 1 | 1 | _ | ✓ | 1 | - | - | _ | - | - | - | _ |
| Flat Board Jamb: | (| veneered |) | | | | (| veneered |) | | | |
| 3 ⁷ / ₈ " Flat Board w/Stop * | _ | _ | _ | ✓ | 1 | _ | - | _ | _ | _ | _ | _ |
| 49/16" Flat Board w/Stop * | Standard | Standard | Standard | ✓ | 1 | ✓ | 1 | Fir | Fir | _ | _ | - |
| 45/8" Flat Board w/Stop * | _ | _ | _ | _ | _ | - | _ | _ | _ | 1 | 1 | / |
| 4 ⁷ / ₈ " Flat Board w/Stop * | 1 | 1 | ✓+ | ✓ | 1 | - | - | - | - | 1 | 1 | / |
| 51/4" Flat Board w/Stop * | _ | _ | _ | ✓ | 1 | _ | - | _ | _ | _ | _ | _ |
| 69/16" Flat Board w/Stop * | 1 | 1 | - | ✓ | ✓ | ✓ | 1 | ✓ | Fir | _ | _ | - |
| 65/8" Flat Board w/Stop * | _ | _ | _ | _ | _ | - | _ | _ | _ | 1 | 1 | / |
| 6 ⁷ / ₈ " Flat Board w/Stop * | _ | _ | - | ✓ | 1 | 1 | - | - | _ | 1 | 1 | / |
| 71/4" Flat Board w/Stop * | 1 | 1 | √ ♦ | - | - | - | - | - | _ | _ | _ | - |
| 81/4" Flat Board w/Stop * | 1 | 1 | √+ | 1 | 1 | 1 | - | - | - | - | - | - |
| $^5/_4$ " x $4^9/_{16}$ " Flat Board w/Stop * | _ | _ | - | ✓ | 1 | ✓ | - | _ | _ | 1 | 1 | / |
| 5/4" x 47/8" Flat Board w/Stop * | 1 | 1 | √+ | ✓ | ✓ | ✓ | - | - | _ | _ | _ | - |
| $^5/_4$ x $6^9/_{16}$ Flat Board w/Stop * | _ | _ | _ | ✓ | 1 | ✓ | _ | _ | _ | 1 | 1 | 1 |
| 5/4" x 67/8" Flat Board w/Stop * | 1 | 1 | √+ | 1 | 1 | 1 | - | _ | _ | _ | _ | - |

| Casing Options: | | CLEAR PINE | PRIMED (FJ) | CLEAR OAK | CLEAR FIR |
|------------------------------------|----------|---------------|----------------|--------------|--------------|
| 8627, 8710, 8725, 8730, 8740, 8753 |) | 1 | 1 | - | - |
| B-300 Baby Windsor | 2-1/2" | _ | 1 | _ | - |
| B-126/B-154 | (2-1/2 | - | - | 1 | - |
| S4S |) | - | 1 | - | _ |
| 8753A or 8731 |) | 1 | _ | - | - |
| 8754, 8308 | 3-1/2" | 1 | 1 | - | - |
| B-200 Windsor | | 1 | 1 | - | _ |
| B-225 Stafford | | 1 | 1 | - | - |
| S4S |) | _ | 1 | _ | _ |
| #37/1266 | } 2-1/4" | 1 | - | - | - |
| B-110 | 2-1/4 | - | _ | 1 | - |
| B-100 | 4-1/4" | 1 | 1 | - | _ |
| • Astragal Options: | | | | | |
| Astragal with 2 Flush Bolts | | 1 | 1 | ✓ | 1 |
| Astragal with No Flush Bolts | | 1 | _ | ✓ | _ |

 $^{^{\}star}$ Most available for 1-3/4" Doors.

 $^{^{\}emptyset}$ Single Rabbet 6'-8" only.

[◆] Clear Pine 1-3/8" 8'-0" Colonial Stop only.

^{• 8&#}x27;-0" Height not available.

Care & Finishing



Please read these recommendations for maximum service and satisfaction. Failure to comply with these guidelines will affect your warranty.

STORAGE AND HANDLING

- ♦ Doors should always be stored flat and in a clean, dry, well-ventilated building.
- ♦ Always handle doors with clean hands or while wearing clean gloves.
- ♦ Do not deliver doors to the jobsite until concrete floors, foundations, and plaster walls are thoroughly dry.
- Doors should not be exposed to excessive moisture, heat, dryness, or direct sunlight.
- ♦ If the doors are to be stored on the job site for more than 5 days, the entire door, including top and bottom edges, should be sealed with a resin or pigmented base sealer.

INSTALLATION

- ♦ Doors should be conditioned to average prevailing relative humidity of the locality before fitting. (Approx. 3 weeks).
- ◆ Do not cut doors down in size more than 1/2" in width (1/4" each side) or 2" in height (1/2" from top of door, or up to 1-1/2" from bottom of door). On Fir or Oak doors trim up to 2" from the bottom of the door.
- ♦ Allow 1/8" clearance between door and frame at the top and sides of the unit.
- ♦ Be sure that jambs and stops are set perfectly square and plumb. Shim and fasten every 2 feet.
- ♦ Use three (3) hinges on doors 7' or less in height, or 3' in width or less, and four (4) hinges on doors over 7' in height or over 3' in width. Hinges must be set in a straight line to prevent distortion.
- ♦ Panels of stile and rail wood doors are designed to "float" so that during climate changes the panels can move without stressing. Before finishing please be sure the panels are aligned with the stiles and rails. Gently correct the alignment by moving the panel with a soft wood block and rubber mallet. Panels that have shifted and must be realigned are not considered manufacturer's defects.
- Special preparation is required with mortise locks in order to maintain the structural integrity of the door. Mortise lock and prep packages are available or contact for special instructions.

FINISHING

- ♦ Finish must be applied to the door immediately after fitting and hanging, but not during or immediately after high-moisture periods.
- ♦ Surfaces must be clean and dry.
- Excess glazing material squeezed out on the visible surface of glass is normal. Caution: Use extreme care when cleaning squeeze out, paint or stain off tempered glass, it scratches easily. Use a plastic scraper not tools made of metal or razor blades.
- Remove all dust, handling marks, grease and repair any handling damage.
- ♦ Sand entire door lightly with 180 grit sandpaper.
- ◆ For maximum performance of finish, the door must be finished lying flat. Finish all 6 sides including edges!
- ♦ You are applying a protective finish to your door that will be lasting. Use only high quality finishes and follow the manufacturer's label instructions. Do not use dark colored stain or paint on surfaces receiving direct sunlight (heat build up will drive out the moisture causing shrinkage and checking).

CLEAR FINISHES OR STAINS

- Pine and Fir doors will accept stain more uniformly if a "pre-stain," "sanding sealer," or "conditioner" is used prior to staining. Other species may not require the treatment prior to staining.
- Apply semi-transparent stain or clear undercoat for the type of application.
- Apply three coats of clear uncut top coat, such as interior or exterior polyurethane. Lightly sand between coats.
- ♦ Solid base stains, Polyurethane stain mixes are not acceptable as the final finish. Apply three coats of top coat as above.

PAINTING

- ♦ Doors should be primed with a high quality primer followed by at least two coats of a high quality latex paint.
- When finishing glazed doors apply top coats generously to bridge between wood and glass. Lap paint onto glass 1/16" to protect against moisture penetration.

If doors are replaced under warranty, BROSCO and manufacturer are not responsible for refinishing or labor costs.

WARRANTIES:

 $For complete \ warranty \ information, please \ visit \ www.simpsondoor.com, \ www.roguevalleydoor.com \ or \ www.jeld-wen.com.$

HELPFUL HINTS:

- All finishes will perform significantly better when protected from the direct effects of sunlight.
- All finishes should be checked thoroughly each year for need to refinish.
- Natural grain and color variations are normal and not considered manufacturing defects.

Manufacturer will not be responsible for doors that are not installed or finished properly.

Redi-Ship® Program



- Simpson Redi-Ship® doors are "almost in stock".
- Factory order with expedited lead time.
- Redi-Ship includes today's most popular doors and matching bifolds for interior applications and supports the requests that in stock inventory does not cover.

Hemlock



















Knotty Alder









Oak







Maple













Redi-Prime® **French Doors**



Redi-Prime® Decorative French Doors



















39



Building Our Futures Together

Since 1890, the BROSCO name has represented our commitment to quality, value and service. We believe in providing low-maintenance, environmentally friendly, energy-efficient millwork products with our northeast regional architectural preferences.









If you cannot find what you're looking for in our stock door offerings, don't worry; we have the ability to provide you with factory custom door design options tailored to your specific needs!

For additional information, please visit brosco.com ~ jeld-wen.com ~ roguevalleydoor.com ~ simpsondoor.com

