# Why BROSCO Primed Doors?




### **Features & Benefits**

### The Superior Case for BROSCO Doors


Features	Benefits	
Tops and bottoms are factory sealed to prevent moisture absorption	Eliminates the top reason for product claims	
Vertical grain	Uniform finish, no visible veneer splices	
Superior panel thickness	Full 3/4" vs 1/2" - 9/16". Deep rich appearance, improves noise reduction	
The panels are contoured fitted to prevent shifting after finishing	No evidence of unsightly lines	
Vertical grain slat 1/4" vs. 3/16"	More stable, significantly reduces warping	
All components are primed prior to assembly	No unpainted surface to show through.  More consistent finishing	
Engineered LVL (Laminated Veneer Lumber) bifold stiles	Will not warp. No unsightly finger-joints	
Wide edge band	Doors are trimmable on the edge beyond 1/4". Frameport uses 3/4" edge band so trimming 1/2" off each side is possible.	
Each door is individually polyolefin wrapped; can be pre-hung in the plastic	Door remains clean in warehouse or on the job. No dust, no oily fingerprints.	
5-Year Limited Warranty	Other manufacturers typically offer a 1-year warranty	
More dowels per rail (see below)  Top: 3 vs. 2 Lock: 5 vs. 3 Bottom: 6 vs. 4	Stronger, more stable construction. Eliminates separation	

#### **BROSCO Construction**

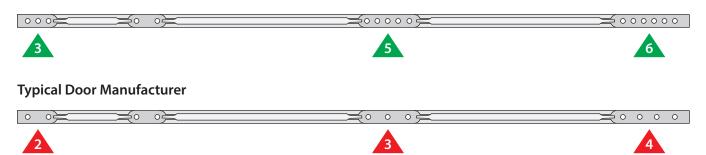



### **BROSCO Interior Doors**

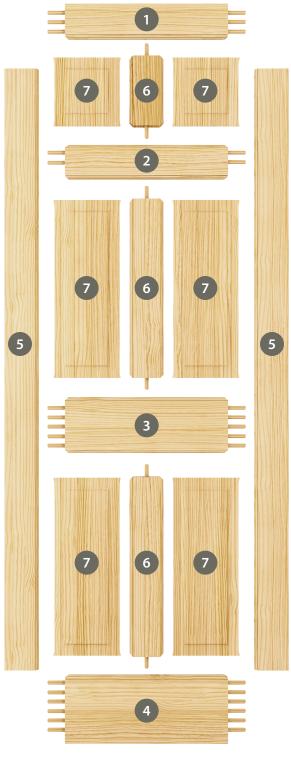



2 Cross Rail

3 Lock Rail



5 Stile

6 Mullion

7 Raised Panel



#### **Contoured Panel Shape**

Contoured panel provides snug fit while allowing panel to breathe and accommodate any expansion/shrinking that may occur from changes in humidity. This eliminates panel shifting after assembly.





Flat panel edges are kerfed and squeezed during panel insertion, allowing them to expand and grip the inside door frame, eliminating rattling.



## Why Primed Shaker Doors?

## The Case for BROSCO Primed Shaker vs Molded Shaker Doors

	Primed Shaker Door	Molded Shaker Door
Factory sealed top and bottom rail	Yes 2 coats	No
Four (4) coat prime process	4 coats	1 coat
Crisp white primer finish	Yes	No
Trim-able 2 inches off bottom	Yes	No
True 90° shaker sticking?	Yes	No, angled
Poly-wrapped with color label (keeps door clean and fingerprint free)	Yes	No
High performance – no quality issues	Yes	No

#### **BROSCO Shaker Door Features:**

- A complete line of flat panel doors in a broad range of configurations
- Available in 1-3/8" and 1-3/4" thicknesses
- 1-3/8" doors also available with Ovolo sticking
- Available in 6/8, 7/0 and 8/0 heights
- Environmentally friendly, FSC Certified
- All doors are TSCA compliant
- 5-year limited warranty

Panel edges are kerfed and squeezed during panel insertion, allowing them to expand and grip the inside door frame, eliminating rattling.







4 Stile

2 Cross Rail

5 Mullion

3 Bottom Rail

6 MDF Panel

